

BANK NOTE PAPER MILL INDIA PRIVATE LIMITED CIN: U21090KA2010PTC055475 | CORPORATE OFFICE, MYSORE

sanchari.mandal@bnpmindia.com

Ph: 0821 2401 179

Open Tender Enquiry No. BNPM/OTE/MCBs/0834/2022-23 Enquiry for supply of MCBs

Issuing Date & Time: 16.02.2023 12:30 hrs. Closing Date & Time: 28.02.2023 11.30 hrs.

A. Scope of supply: Supply of following items: (*Reference Image attached*)

S No	Item Description	UOM	Quantity
1	MCB ,4 Pole, 10Amps , AC		
	<u>Details:</u>	Nos	15
	No. of Poles: 4,		
	Current Rating: 10A,		
	Voltage: 415V AC,		
	Freq.: 50Hz,		
	Icu: 10 KA,		
	Curve type: C		
	Connections: Cage Screw terminals with neutral on right,		
	Suitable for DIN Rail mounting,		
	Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB		
	or any other equivalent brand approved by BNPM		
	MCB 1P AC 16A		
2	<u>Details:</u>		
	No. of Poles:1,		
	Current Rating: 16 A ,		
	Volts: 230 V AC,	Nos	10
	Freq.: 50Hz		
	Icu: 10 KA,		
	Curve type: C		
	Connections: Screw terminals with neutral on right,		
	Terminal arrangement: cage type with protection against		
	direct finger contact,		
	Suitable for DIN Rail mounting,		
	The MCB shall have Dual Termination for wire & bus bar on		
	both sides and electrical life upto 20,000 operations.		
	Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB		



	MCB 1P AC 10A		
3	Details:		
	No. of Poles:1,		
	Current Rating: 10A,		
	Volts: 230 V AC,	Nos	10
	Freq.: 50Hz		
	Icu: 10 KA,		
	Curve type: C		
	Connections: Screw terminals with neutral on right,		
	Terminal arrangement: cage type with protection against		
	direct finger contact,		
	Suitable for DIN Rail mounting		
	The MCB shall have Dual Termination for wire & bus bar on		
	both sides and electrical life upto 20,000 operations.		
	Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB		
	MCB 2P AC 16A		
4	Details:		
	No. of Poles:2,		
	Current Rating: 16A,	Nos	10
	Volts: 415V AC,		
	Freq.: 50Hz,		
	Icu: 10 KA,		
	Curve type: C,		
	Connections: Screw terminals with neutral on right,		
	Terminal arrangement: cage type with protection against		
	direct finger contact,		
	Suitable for DIN Rail mounting,		
	The MCB shall have electrical life upto 20,000 operations.		
	Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB		

S. No	Particulars	Quantity			
1.	Payment Terms	100% within 30 days from date of receipt and acceptance of goods by the consignee at destination and on production of all required documents by the supplier.			
2.	Price	Price should be inclusive of all taxes & duties.			
3.	Freight	Shall be included in quoted price.			



	Packing & Forwarding	Shall be included in quoted price.
5.	Delivery Terms	F.O.R – Bank Note Paper Mill India Private Limited, Mysore.
6.	Warranty Period	Years From date of supply at BNPM, Mysuru.
7.	Warranty Certificate	Applicable / Not Applicable
8.	Delivery Period	
9.	Validity of Bid	30 days from date of closing of tender.
10	Liquated damages	Liquidated damages shall be applicable at the rate of 0.5% per week or part thereof until actual delivery or performance, subject to a maximum deduction of 10% of the delayed good's /service's contract price.
11.	Material to be delivered at	Engineering Stores, Bank Note Paper Mill India Private Limited, Note Mudran Nagar, Mysore 570 003.
12.	Contact person	Ms. Sanchari Mandal P: 0821-2401179

Price Bid Format:

S No	Description	UOM	Qty.	Unit rate	Freig ht, P&F Char ges	GS T @ %	Unit rate includi ng GST & Freigh t, P&F Charge s	Grand total inclusive of GST and Freight, P&F Charges (F.O.R, BNPM, Mysore)
1	MCB,4 Pole, 10Amps, AC Details: No. of Poles: 4, Current Rating: 10A,	Nos	15					




2	Voltage: 415V AC, Freq.: 50Hz, Icu: 10 KA, Curve type: C Connections: Cage Screw terminals with neutral on right, Suitable for DIN Rail mounting, Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB or any other equivalent brand approved by BNPM MCB 1P AC 16A Details: No. of Poles:1, Current Rating: 16 A, Volts: 230 V AC, Freq.: 50Hz Icu: 10 KA, Curve type: C Connections: Screw terminals with neutral on right, Terminal arrangement: cage type with protection against direct finger contact, Suitable for DIN Rail mounting, The MCB shall have Dual Termination for wire & bus bar on both sides and electrical life upto 20,000 operations. Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB	Nos	10			7
3	MCB 1P AC 10A Details: No. of Poles:1, Current Rating: 10A, Volts: 230 V AC,	Nos	10			



Freq.: 50Hz Icu: 10 KA , Curve type: C Connections: Screw to with neutral on right, Terminal arrangement with protection again finger contact, Suitable for DIN Rail of the MCB shall have D Termination for wire on both sides and elect upto 20,000 operation Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB MCB 2P AC 16A Details: No. of Poles:2, Current Rating: 16A , Volts: 415V AC, Freq.: 50Hz , Icu: 10 KA , Curve type: C , Connections: Screw to with neutral on right, Terminal arrangement with protection again finger contact, Suitable for DIN Rail of the MCB shall have elected upto 20,000 operation Make: Schneider Electric/Legrand /C & S/Hager/L&T/ABB	t: cage type st direct nounting ual & bus bar etrical life is. Nos Nos rminals t: cage type st direct nounting, ectrical life is.	& any oth	_		
			figures	;	
Total price inclusive of	;				





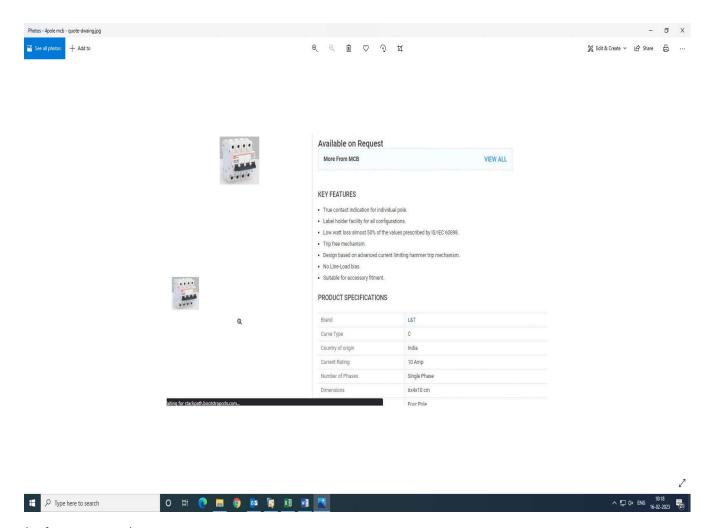

(Reference Image)

NOTE: Interested bidders are recommended to register themselves at company's website https://bnpmindia.com/Vendor.aspx in order to get future enquiries of relevant items

